



CANON CISS USE MANUAL

Installing steps


1, First of all, unrip the labels from the original ink cartridge.

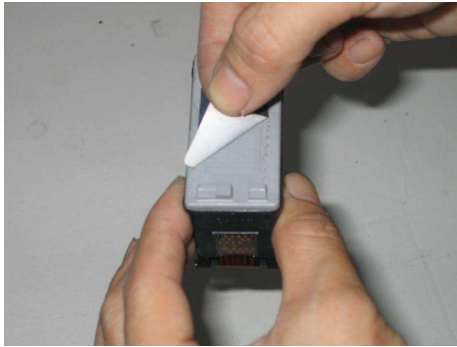

2, Use tool to punch the hole of ink cartridge to be bigger

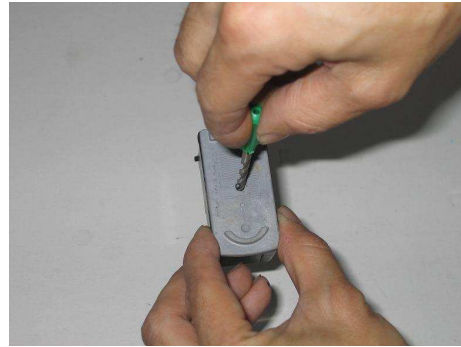

3, Put the sealed loop in the punched hole.

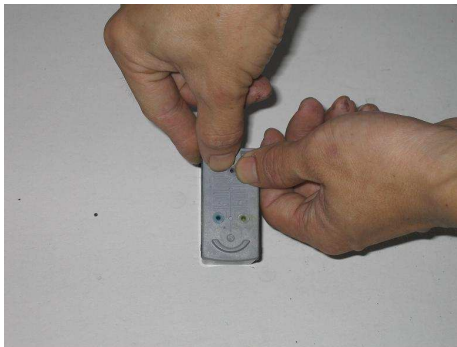

4, Put the tubes of CISS into the ink cartridge, please kindly note that the color of the tube must be in accordance with the color of holes, adjust the head of tube to the right direction, and fix it, with glue to seal the hole for prohibition inleakage of air.



5, Pull up the rubber plug in the air hole when you use the refill tool to take the ink to the ink cartridge from CISS gradually.



6, Put the ink cartridges into the printer, Use tube clincher fix the tube on printer.



7, Pull out the small rubber plug in the air hole and put air filter into air hole,



Notices:

- (1) During the whole operation of installation, do not destroy the printing head on the bottom of ink cartridge and the lateral circuit, otherwise the ink cartridge will be useless.
- (2) Don't pick up the inner cartridges when the printer is working.
- (3) Keep the reservoirs stands during printing. And don't allow the reservoirs be higher or lower than the printer. We should keep the two in the same horizontal line.

