


HP363 CISS Instruction

How to fill ink by ink filling machine:

Step 1: Pull out the rubber plug from the ink tank. Insert the tube of the ink filling machine into the ink filling hole.

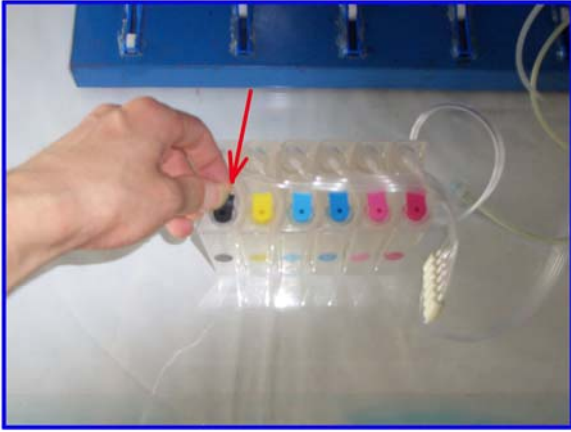


(1)




(2)

Step 2: Turn on the vacuum pump while close the Air Valve. After you draw the air for about 1 minute, then open the air valve, so that the ink can flow into the CISS automatically. Recap the rubber plug in the the ink tank after filling ink.

Note: Don't fill ink too full in the ink tank. Leave about 3 cm space from the top of the ink tank.

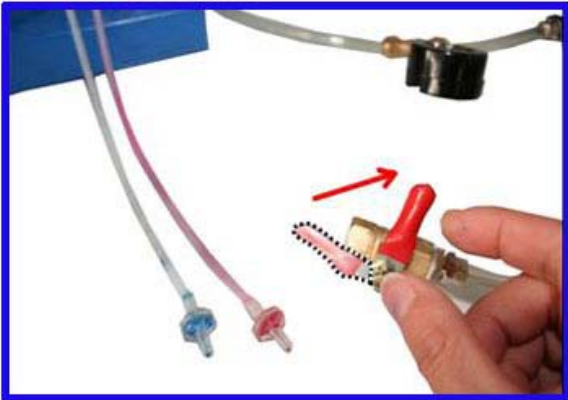

(3)

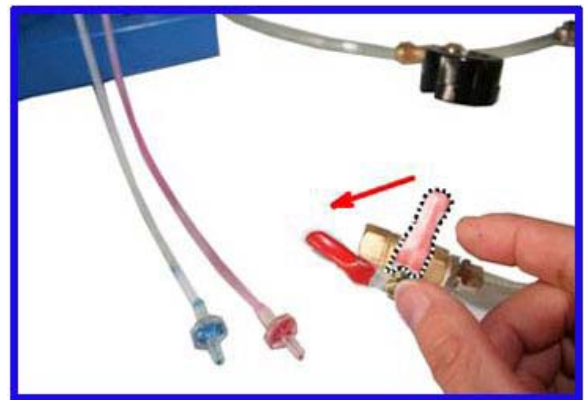


(4)




(5)

How to install the CISS:

Step 1: When installing the cartridges in the printer, tear the tubes among the cartridges about 2 cm, so that it is easier to install the cartridges.

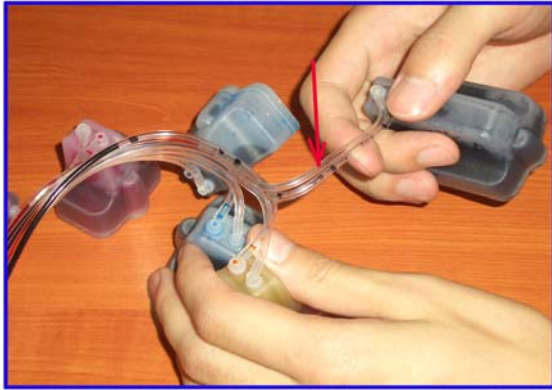

(6)

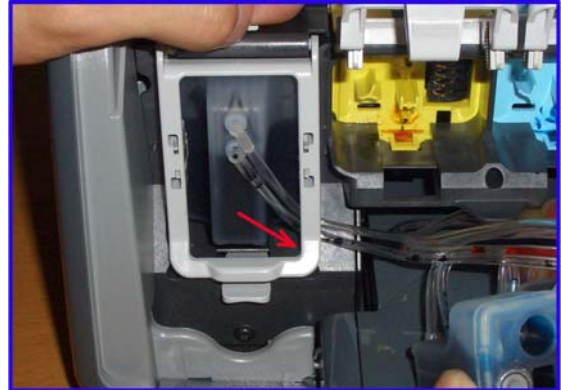


(7)

Step 2: After installing the cartridge, pull the 2 tubes of every cartridge out of the cover of the cartridge carriage, so that the excessive tube will not make trouble when printing. Then examine if there is twisting problem about the tube. If the tube is twisted, pls re-install the cartridge.

Note: Don't pull the tube with too much strength.



(8)

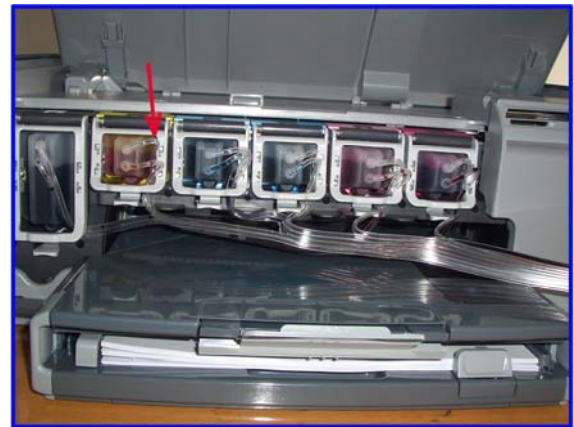

(9)

Step 3: After installing the cartridge, pls close the top cover of the printer. Place Clip 1 as in picture 11. Then place Clip 2 as in picture 12.



(10)



(11)



Step 4: When printing, pls pull the rubber plug out of the ink tank, and insert the air filter.



Notice:

1. Pls keep the ink tank on the same level as the printer.
2. When installing the cartridge, don't twist the tube.